


D281 PH-6283(1/2)

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILLO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE [1/10W] UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
4. VOLTAGE IN NO MARK SHOWS VHI HIGH BAND CONDITION.
5. VOLTAGE IN / SHOWS LIGHT ON/OFF CONDITION.

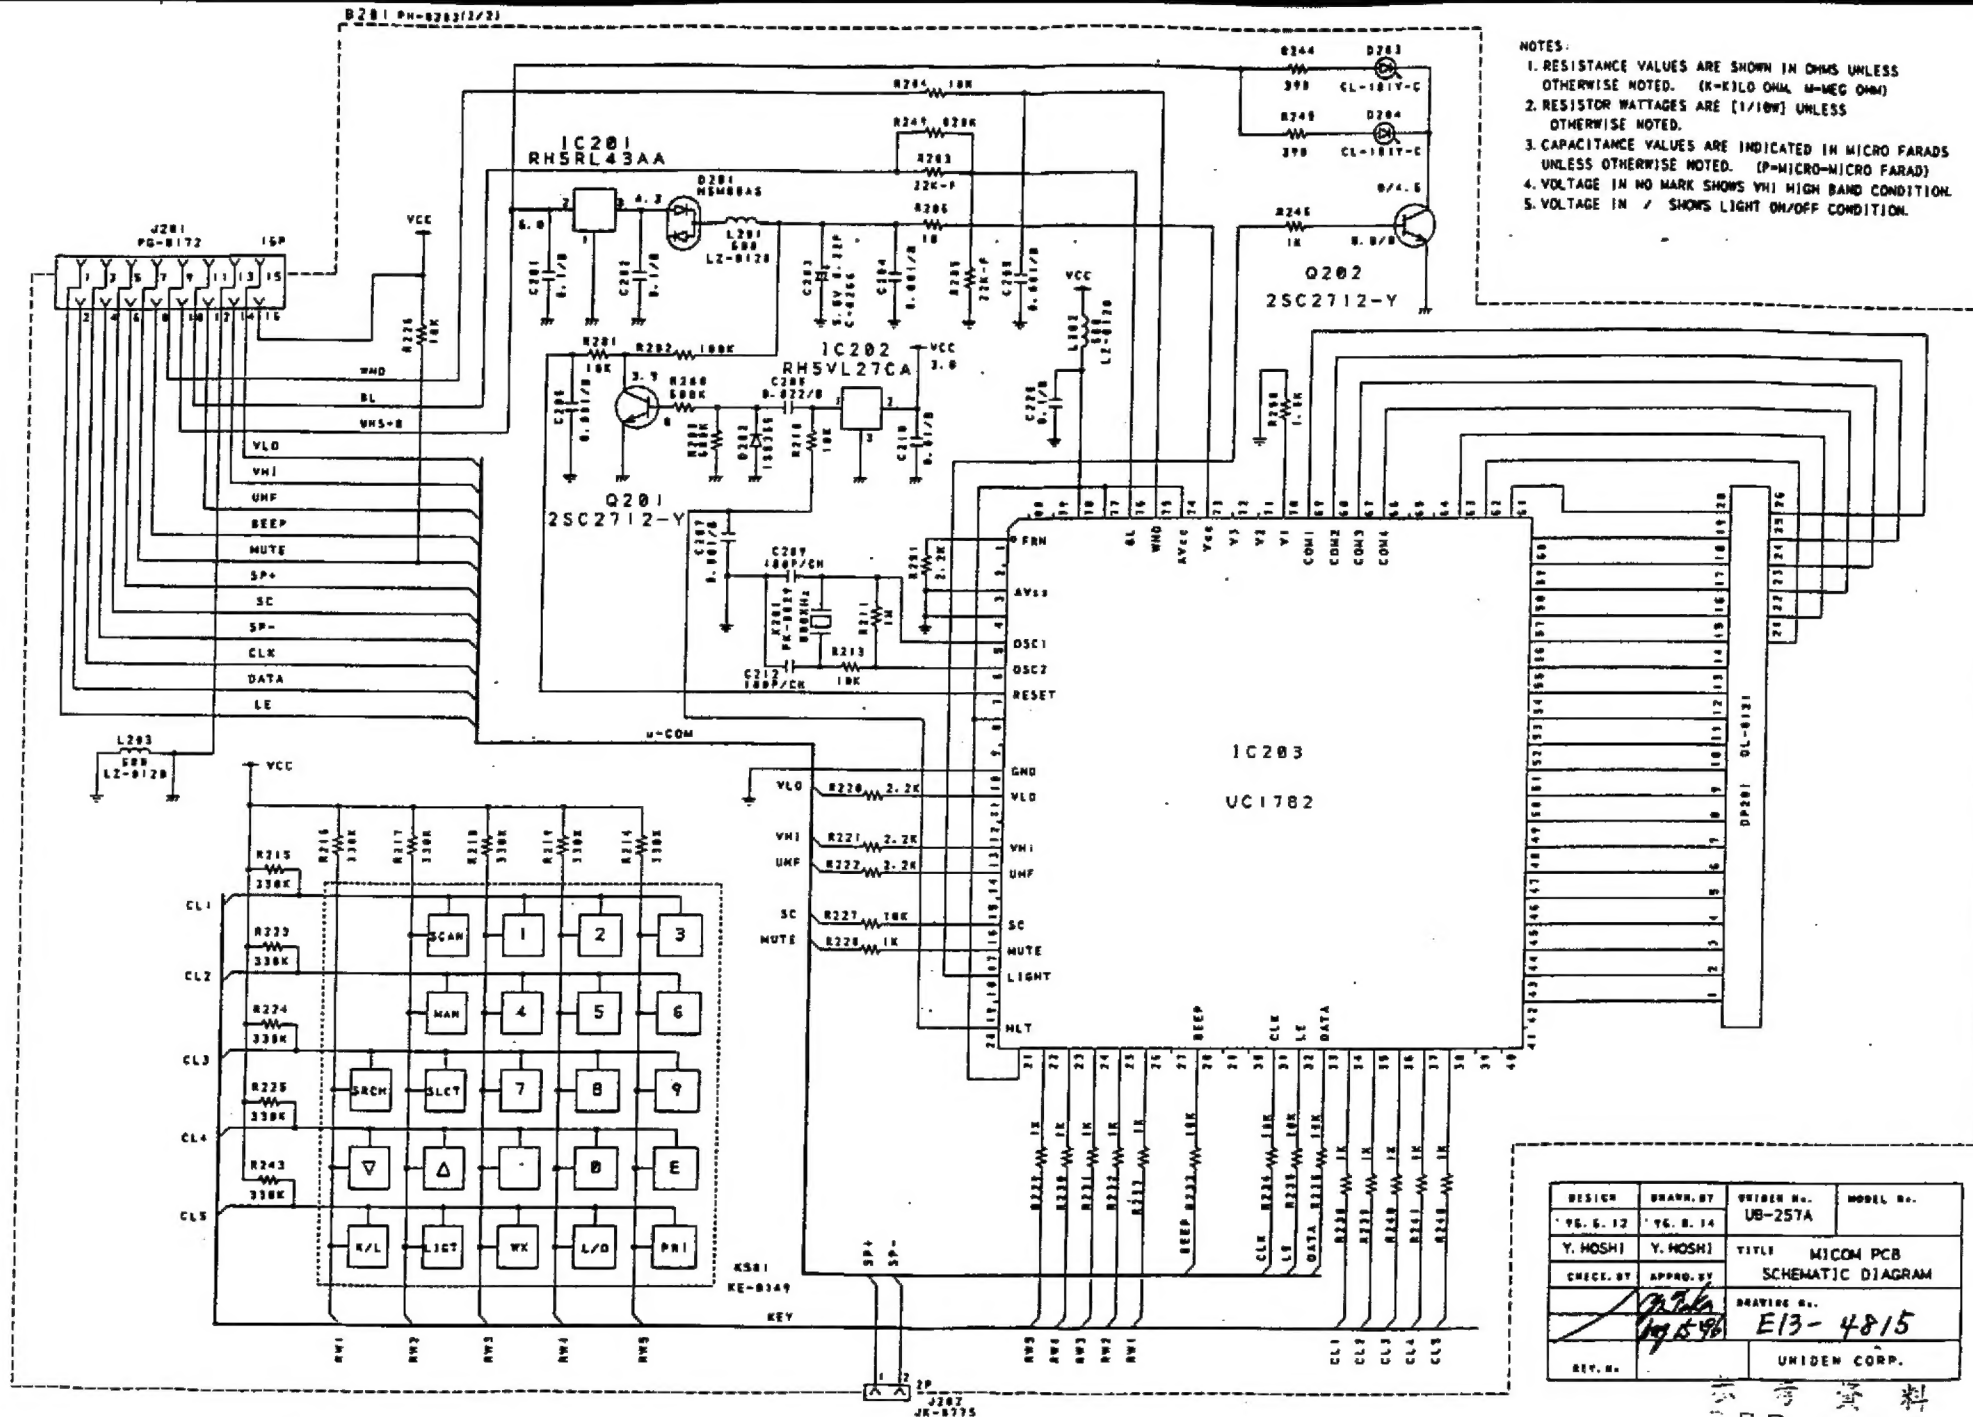

DESIGN	DRAWN BY	DESIGN NO.	MODEL NO.
Y. G. 12	Y. G. 14	UB-257A	
Y. HOSHI	Y. HOSHI	TITLE	MICOM PCB
CHECK BY	APPROV BY		SCHEMATIC DIAGRAM
		DRAWING NO.	E13-4815
REV. NO.			UNIDEN CORP.

資料
REF. ONLY
AF6.5H